

Quantum communications with time-bin entangled photons: long distance quantum teleportation and quantum repeaters

N. Gisin[†], I. Marcikic[†], H. de Riedmatten[†], W. Tittel^{†,‡} and H. Zbinden[†]

[†]Group of Applied Physics-Optique, University of Geneva, CH-1211, Geneva 4, Switzerland

[‡]QUANTOP - Danish National Research Foundation Center for Quantum Optics,
Institute for Physics and Astronomy, University of Aarhus, Denmark

Using 2 km of standard telecom optical fibres, we teleport qubits carried by photons of 1.3 μm wavelength to qubits in another lab carried by a photons of 1.5 μm wavelength. The photons to be teleported and the necessary entangled photon pairs are created in two different non-linear crystals. The measured mean fidelity is of 81.2%. We discuss how this could be used as quantum repeaters without quantum memories.

I. INTRODUCTION

Long distance quantum communication in optical fibers should exploit the standard and widely installed telecom fibers. This standard imposes the wavelength (either around 1300 nm, or around 1550 nm). It does also strongly suggest that polarization encoding is not the optimal choice. Indeed, polarization effects in telecom fibers fluctuate on a time scale from ms to tens of minutes for aerial and underground cables, respectively. These unavoidable fluctuations require active feedback and/or compensation schemes. An alternative consists in encoding the qubits in time-bins. Time-bin qubits have already been used for quantum cryptography[1], for the production of non-maximally entangled qubits[2] and to encode quantum states in higher dimensional Hilbert spaces[3]. In this contribution we present the results of an experimental demonstration of long distance quantum teleportation, using time-bin qubits. In section III we present a potential application of quantum teleportation as "quantum repeaters without quantum memory".

II. QUANTUM TELEPORTATION

Our experiment is schematically presented on Fig. 2. For a general introduction to quantum teleportation and previous experiments, we refer to[6, 7, 8, 9, 10].

A mode locked Ti:Sapphire laser produces 150 fs pulses at $\lambda = 710$ nm. The laser beam is split into two parts. The transmitted beam is used to create entangled time-bin qubits (EPR source) by passing the beam first through an unbalanced bulk Michelson interferometer with optical path-length difference $\Delta\tau = 1.2$ ns and then through a type I non-linear crystal (LBO) where entangled non-degenerate collinear time-bin qubits at telecom wavelengths (1310 and 1550 nm) are created. The pump light is removed with a silicon filter (SF) and the twin photons are collimated into an optical fibre and separated by a wavelength-division-multiplexer (WDM). The 1310 nm photon is then sent to Charlie and its twin 1550nm photon to Bob. The entangled state is described by $|1, 0\rangle_{\text{Charlie}} \otimes |1, 0\rangle_{\text{Bob}} + |0, 1\rangle_{\text{Charlie}} \otimes |0, 1\rangle_{\text{Bob}}$, where $|1, 0\rangle$ and $|0, 1\rangle$ represents the first and second time-bin, respectively.

The reflected beam is used to create the qubits to be teleported. Similar to the creation of the entangled pairs, the beam is focussed into a LBO crystal creating pairs of photons at 1310 nm and 1550 nm wavelengths. After blocking the pump light and coupling the photon pairs into an optical fibre, the 1550 nm photon is removed using a WDM. Alice passes the 1310 nm photon through a qubit preparation device, thereby creating a state $|\psi_{\text{Alice}}\rangle = a_0|1, 0\rangle + a_1e^{i\alpha}|0, 1\rangle$, where $a_0 = 0, 1$ or $1/\sqrt{2}$ and $a_0^2 + a_1^2 = 1$. Alice's qubit is finally sent to Charlie. Charlie performs the joint Bell-state measurement between the qubit sent by Alice and his part of the pair, with the 50/50 fibre coupler BS. We select only the projection onto the singlet entangled state $|\psi^{(-)}\rangle = |1, 0\rangle_{\text{Alice}} \otimes |0, 1\rangle_{\text{Charlie}} - |0, 1\rangle_{\text{Alice}} \otimes |1, 0\rangle_{\text{Charlie}}$. This takes place when the two photons trigger the detectors labelled C1 and C2 on Fig. 2 at times that differ precisely by the time difference $\Delta\tau$ between two time-bins. Detectors C1 and C2 are a LN_2 cooled passively quenched Ge avalanche photodiode (APD) and a Peltier cooled InGaAs APD respectively[11]. Bob is situated in another lab, 55 m away from Charlie. To simulate a longer dis-

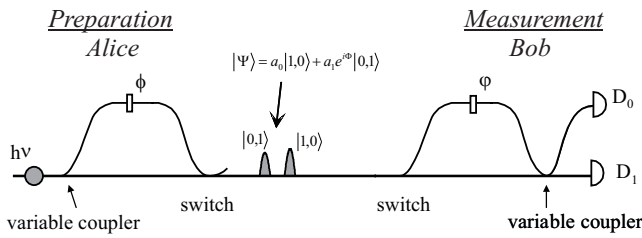


FIG. 1: Preparation and measurement of time bin qubits

Figure 1 presents a general preparation and measurement scheme for time-bin qubits[4]. In principle, any state can be deterministically prepared and ideal measurements in any basis performed. In practice, however, the switches are replaced by passive couplers, hence induce 50% loss. Also, in our experiment we replaced the variable coupler either by a passive coupler (corresponding to a coupling ratio of 50%), or by fibers of appropriate lengths (corresponding to 0% and 100% coupling ratios)??.

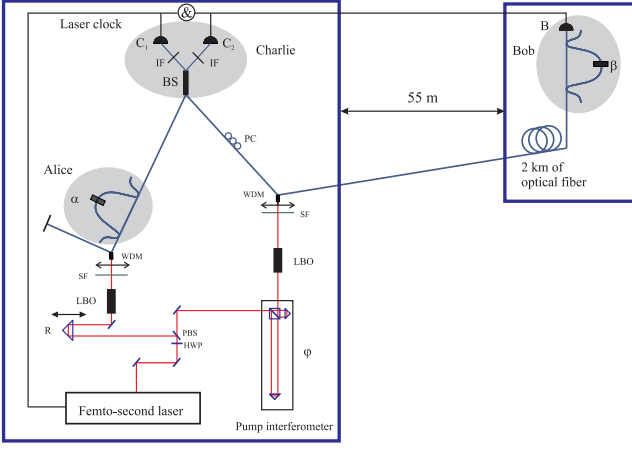


FIG. 2: Experimental setup

tance we added 2 km of optical fibre before the teleported photon reaches Bob's analyser.

The quality of the teleportation is usually reported in terms of fidelity $\bar{F}$, i.e. the probability that Bob's qubit successfully passes an analyser testing that it is indeed in the state ψ_{Alice} prepared by Alice, averaged over all possible ψ_{Alice} . The linearity of quantum mechanics implies:

$$\bar{F} = \int \langle \psi_{Alice} | \rho_{Bob} | \psi_{Alice} \rangle d\psi_{Alice} = \frac{2}{3} F_{equator} + \frac{1}{3} F_{pole} \quad (1)$$

where $F_{equator}$ and F_{pole} , are the fidelities averaged only over the states corresponding to the equator and the poles of the Poincaré sphere, respectively.

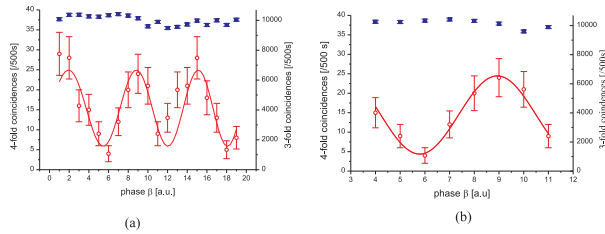


FIG. 3: Teleportation of equatorial states. Open circles are 4-fold coincidences (3 photons + laser clock), i.e detection of Bob's photon conditioned on a successful Bell measurement. Black squares are 3-fold coincidences (Photons C1+B+ laser clock). They should remain constant, since they contains no information about the Bell measurement

In our experiment we measured F_{pole} directly, by preparing and measuring each of the two corresponding states: $F_{pole} = (82.5 \pm 3)\%$. In order to measure $F_{equator}$, we prepared various states, using a 50/50% coupler with various phases α , and for each scanned the analyzing interferometer's phase β . From the raw visibility V_{raw} one obtains the fidelity $F = \frac{1+V_{raw}}{2}$. Typically, we obtain $F_{equator} = (80.5 \pm 2.5)\%$ (Fig. 3a), with best results achieving values up to $(85 \pm 2.5)\%$ (Fig. 3b). Accord-

ingly, the measured fidelity, averaged over all possible states ψ_{Alice} equals $\bar{F} = (81.2 \pm 2.5)\%$.

III. QUANTUM REPEATERS WITHOUT QUANTUM MEMORIES

Generally, quantum channels are lossy, hence the probability that a single photon sent by Alice reaches Bob decreases with distance. Because of the no-cloning theorem, there is no way to merely amplify the signal. With noise-free detectors, the attenuation would only affect the bit rate, and protocols like quantum cryptography would provide secure keys for arbitrary distances. However, realistic detectors have a finite probability of dark counts (around 10^{-4} per ns for InGaAs APDs[11]). This noise is independent of the distance, hence there is a limiting distance after which the signal becomes smaller than the noise. In a series of papers, H. Briegel and co-workers[12] have shown that the appropriate use of entanglement purification and of quantum memories allows one, in principle, to realize quantum repeaters which would extend the range of quantum cryptography to unlimited distances, with only a polynomial increase of repeater stations. This is a promising line of research for experimental physics, but it is only fair to say that it will remain a research topic for the years to come.

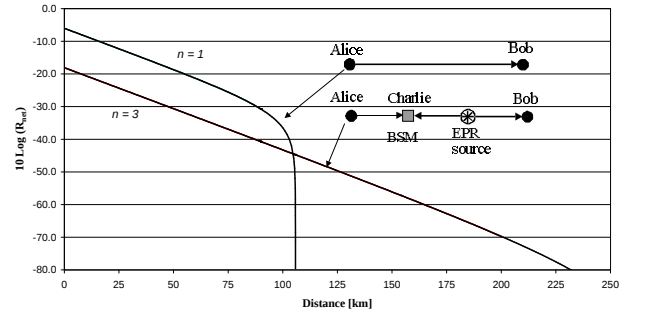


FIG. 4: Net count rate as a function of the distance when Alice is directly connected to Bob ($n=1$) and in the case of teleportation ($n=3$)

However, without quantum memories and using only near future technologies (like the ones presented in this contribution), there are ways to extend the distances over which secret quantum keys can be distributed, although not to unlimited distances[13, 14, 15]. Assume that Alice and Bob are connected by a quantum communication channel with transmission coefficient t . Denote η the photon counting detector's efficiency and D the dark count probability per transmission (i.e. per qubit). Furthermore, denote C and Q the rates of correctly and incorrectly detected photons: In good approximation[17],

we have $C = t\eta$, $Q = (1 - t\eta)D$. Accordingly, the total rate of transmission R_{raw} and the QBER (Quantum Bit error Rate) read:

$$R_{raw} = C + Q \quad QBER = \frac{Q}{C + Q} \quad (2)$$

The net rate R_{net} , after error correction and privacy amplification, is proportional to the raw rate R_{raw} with a coefficient that depends on the $QBER$ [13]. This coefficient is the difference between the Alice-Bob I_{AB} and the Alice-Eve I_{AE} mutual Shannon informations (or the Bob-Eve one, if smaller). The exact relation between I_{AE} and the QBER depends on the exact eavesdropping model. Our results are essentially independent of the details, though numerical values may slightly differ. For the optimal individual attack, $I_{AB} - I_{AE}$ is almost a linear function of the QBER, hence we use the approximation:

$$R_{net} \approx R_{raw} \cdot \left(1 - \frac{QBER}{15\%}\right) = C - \frac{85}{15}Q \quad (3)$$

With realistic numbers, $\eta = 0.25$, $D = 10^{-4}$, and an attenuation coefficient $\alpha = 0.25$ dB/km (i.e. $t = 10^{-\alpha L/10}$, L = fiber length), this sets an absolute limit for quantum key distribution around 105 km (even with perfect single photon sources), see Fig. 4. Consider now the case where the channel is divided into 3 sections, each of length $L/3$, i.e. with transmission coefficient $t^{1/3}$ (Fig. 4), exactly as in a quantum teleportation experiments. In such a configuration, Bob correctly detects the qubit whenever all 3 photons make it to their detectors, all 3 detectors click and the Bell measurement is successful, i.e. $C^{(3)} = \frac{1}{2}(t^{1/3}\eta)^3 = \frac{1}{2}t\eta^3$. The rate of incorrect detections contains three parts[18]: (i) all 3 photons are lost and there are 3 dark counts, (ii) 2 photons are lost, 1 detected and there are 2 dark counts, (iii) 1 photon is lost, 2 detected and there is one dark count. Accordingly:

$$\begin{aligned} Q^{(3)} &= (1 - t^{1/3}\eta)^3 \cdot D^3 + 3t^{1/3}\eta(1 - t^{1/3}\eta)^2 \cdot D^2 \\ &\quad + 3(t^{1/3}\eta)^2(1 - t^{1/3}\eta) \cdot D \\ &= \left(t^{1/3}\eta + (1 - t^{1/3}\eta)D\right)^3 - t\eta^3 \end{aligned} \quad (4)$$

The corresponding net rate, with the same parameters, is also displayed on Fig. 4. Clearly, the division of the channel into 3 trunks and the use of teleportation increases significantly the maximal distance over which quantum key distribution is possible. The generalization to divisions into n trunks is straightforward. For given parameters the limiting distance increases with n , up to a maximum, and then decreases again.

IV. CONCLUDING REMARKS

Objects are constituted by energy and structure (or matter and form according to Aristotle). In quantum teleportation one does not teleport neither energy nor matter. However, the ultimate structure of objects is indeed teleported from and place to another, without the object ever being anywhere in between! Admittedly, teleportation of systems much more complex than a simple qubit is still elusive. But the teleportation of qubits could already be useful for quantum cryptography, though much effort still have to be devoted to improve the results of this first long distance realization, especially the stability of the experimental scheme.

Financial support by the Swiss OFES and NSF within the framework of the European IST project Qucomm and the Swiss National Center for Quantum Photonics is acknowledged. W.T. acknowledges funding by the ESF Programme Quantum Information Theory and Quantum Computation (QIT).

-
- [1] W. Tittel, J. Brendel, H. Zbinden and N. Gisin, Phys. Rev. Lett. **84**, 4737, 2000.
 - [2] R. Thew, S. Tanzilli, W. Tittel, H. Zbinden, N. Gisin, Phys. Rev. A **66**, 062304 (2002).
 - [3] H. de Riedmatten, I. Marcikic, H. Zbinden and N. Gisin, Quant. Inf. Comput. **2**425-433 (2002); and these proceedings.
 - [4] W. Tittel and G. Weihs, Quantum Information & Computation, **1**, 3, 2001.
 - [5] The replacement of the switches is necessary because real

- and fast switches have losses even larger than 50%. However, real variable couplers could be used.
- [6] C.H. Bennett, G. Brassard, C. Crépeau, R. Jozsa, A. Peres, and W.K. Wootters, Phys. Rev. Lett. **70**, 1895, 1993.
- [7] D. Bouwmeester, J.W. Pan, K. Mattle, M. Eibl, H. Weinfurter, and A. Zeilinger, Nature**390**, 575, 1997.
- [8] D. Boschi, S. Branca, F. De Martini, L. Hardy, and S. Popescu, Phys. Rev. Lett.**80**, 1121, 1998.
- [9] Y.-H. Kim, S. P. Kulik, and Y. Shih, Phys. Rev. Lett.

- 86**, 1370, 2001.
- [10] A. Furusawa, J. L. Sørensen, S. L. Braunstein, C. A. Fuchs, H. J. Kimble, and E. S. Polzik, *Science* **282**, 706, 1998.
 - [11] D. Stucki, G. Ribordy, A. Stefanov, and H. Zbinden, *J. of Mod. Optics* **48**, 1967, 2001. Available from www.idQuantique.com.
 - [12] H. Briegel, W. Dur, J.I. Cirac, and P. Zoller, *Phys. Rev. Lett.* **81**, 5932, 1998.
 - [13] N. Gisin, G. Ribordy, W. Tittel, and H. Zbinden, *Rev. Mod. Phys.* **74**, 145, 2002.
 - [14] E. Waks, A. Zeevi, and Y. Yamamoto, *Phys. Rev. A* **65**, 052310, 2002.
 - [15] B. C. Jacobs, T. B. Pittman, J. D. Franson, *Phys. Rev. A* **66**, 052307 (2002)
 - [16] D. Stucki, N. Gisin, O. Guinnard, G. Ribordy, H. Zbinden, *New J. of Phys.* **4**, 41.1-41.8 (2002).
 - [17] We checked that a complete analysis doesn't change qualitatively the results
 - [18] We assumed that the detector noise completely dominates the error rate. This is a reasonable assumption when Alice is directly connected to Bob (i.e. when $n = 1$), see[16]. But, clearly, when the systems gets more complex, optical alignment is less optimal. How this optical contribution to the error rate scales with n depends on the detailed implementation. From our experiment we believe that the "optical error rate" can be maintained quite low.